

FORM PTO-1390 (Modified) (REV 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>1908</b>	
<b>TRANSMITTAL LETTER TO THE UNITED STATES</b> <b>DESIGNATED/ELECTED OFFICE (DO/EO/US)</b> <b>CONCERNING A FILING UNDER 35 U.S.C. 371</b>				U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR <div style="font-size: 1.2em; font-weight: bold;">10/030832</div>	
INTERNATIONAL APPLICATION NO. <b>PCT/DE 00/02250</b>		INTERNATIONAL FILING DATE <b>JULY 11, 2000</b>		PRIORITY DATE CLAIMED <b>JULY 15, 1999</b>	
TITLE OF INVENTION <b>METHOD FOR DETECTING CHANGES OF SCENE, AND MONITORING SYSTEM THEREFOR</b>					
APPLICANT(S) FOR DO/EO/US <b>Michael MEYER, Michael HOETTER, Jens DREVES</b>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371 (c) (2))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input type="checkbox"/> A copy of the International Search Report (PCT/ISA/210).</li> <li>8. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))           <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>9. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>10. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).</li> <li>11. <input type="checkbox"/> A copy of the International Preliminary Examination Report (PCT/IPEA/409).</li> <li>12. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).</li> </ol>					
<b>Items 13 to 18 below concern document(s) or information included:</b>					
<ol style="list-style-type: none"> <li>13. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>14. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>15. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.                              A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li>16. <input type="checkbox"/> A substitute specification.</li> <li>17. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>18. <input checked="" type="checkbox"/> Certificate of Mailing by Express Mail</li> <li>19. <input type="checkbox"/> Other items or information:</li> </ol>					
ET 755324 124 US					

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) <b>10/030832</b>		INTERNATIONAL APPLICATION NO. <b>PCT/DE 00/02250</b>		ATTORNEY'S DOCKET NUMBER <b>1908</b>	
-------------------------------------------------------------------	--	------------------------------------------------------	--	-----------------------------------------	--

20. The following fees are submitted: <b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :</b> <input type="checkbox"/> Search Report has been prepared by the EPO or JPO ..... <b>\$930.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) ..... <b>\$720.00</b> <input type="checkbox"/> No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) ..... <b>\$790.00</b> <input checked="" type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$1,070.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) ..... <b>\$98.00</b>  <div style="text-align: right;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></div>				<b>CALCULATIONS PTO USE ONLY</b>          <div style="display: flex; justify-content: space-between;"> <span><b>\$890.00</b></span> <span></span> </div>	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				<div style="display: flex; justify-content: space-between;"> <span><b>\$0.00</b></span> <span></span> </div>	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	12 - 20 =	0	x \$18.00	<b>\$0.00</b>	
Independent claims	2 - 3 =	0	x \$80.00	<b>\$0.00</b>	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$890.00</b>	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>SUBTOTAL =</b>				<b>\$890.00</b>	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				<b>\$0.00</b>	
<b>TOTAL NATIONAL FEE =</b>				<b>\$890.00</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>	
<b>TOTAL FEES ENCLOSED =</b>				<b>\$890.00</b>	
				Amount to be: refunded	\$
				charged	\$

☐ A check in the amount of \_\_\_\_\_ to cover the above fees is enclosed.  
  
☒ Please charge my Deposit Account No. **19-4675** in the amount of **\$890.00** to cover the above fees.  
 A duplicate copy of this sheet is enclosed.  
  
☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-4675** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

**STRIKER, STRIKER & STENBY**  
**103 EAST NECK ROAD**  
**HUNTINGTON, NEW YORK 11743**

SIGNATURE

NAME

27233

REGISTRATION NUMBER

JANUARY 10, 2002

DATE

107030832

531 Rec'd PCT/A 10 JAN 2002

UNITED STATES PATENT AND TRADEMARK OFFICE

Examiner:

Group:

Attorney Docket # 1908

Applicant(s) : MEYER, M., ET AL

Serial No. :

Filed :

For : METHOD FOR DETECTING CHANGES OF SCENE,  
AND MONITORING SYSTEM THEREFOR

**SIMULTANEOUS AMENDMENT**

January 10, 2002

Honorable Commissioner of Patents and Trademarks  
Washington, D.C. 20231

S I R S:

Simultaneously with filing of the above identified application  
please amend the same as follows:

In the Claims:

Cancel all claims without prejudice.

Substitute the claims attached hereto.

**REMARKS:**


This Amendment is submitted simultaneously with filing of the above identified  
application.

With the present Amendment applicant has amended the claims so as to eliminate  
their multiple dependency.

10/030832  
531 Rec'd PCT 10 JAN 2002

Consideration and allowance of the present application is most respectfully requested.

Respectfully submitted,

  
Michael J. Striker  
Attorney for Applicant(s)  
Reg. No. 27233

## Claims

1. A method for detecting changes in a viewfield that is observed by a stationary image capturing device (1), in which a reference image of the viewfield is compared to at least one current image of the viewfield, characterized in that based on the reference image and the current image, a reference edge image and an edge image are established (10, 11), that the correlation of at least one region of the edge image with the corresponding partial image of the reference edge image is determined (20, 21), and that when the correlation falls below a threshold, the region is identified as changed (70).

2. The method according to claim 1, characterized in that the correlation of the edge image with the reference edge image is determined (21) and that an alarm is output (110) when at least one region is detected as changed for a predetermined time (T1) longer than the edge image is detected as changed.

3. The method according to claim 2, characterized in that an alarm is output (110) when the at least one region of the edge image is detected as changed for longer than an additional predetermined time (T2), where the additional predetermined time (T2) is greater than the predetermined time (T1).

4. The method according to [one of the preceding claims] claim 1, characterized in that when the threshold is exceeded, the average quadratic deviation of the region of the edge image from the corresponding partial image of the reference edge image is determined (40), where a possible brightness difference between the reference edge image and the edge image is eliminated from the calculation so that by computing the image noise, a determination can be made as to whether there is a deviation of the region of the edge image from the partial image of the reference edge image that does not result from image noise and the brightness difference.

5. The method according to claim 4, characterized in that in the event that there is no deviation, the current image noise is computed and is stored for use in a subsequent image comparison.

6. The method according to [one of the preceding claims] claim 1, characterized in that the viewfield contains an object to be monitored.

7. The method according to claim 6, characterized in that the object is an exhibited object, in particular in a museum, or is an automated teller machine, where at least one region is constituted by the keypad field and/or the cash distribution slot and/or a card slot of the automated teller machine.

8. A monitoring system with a computer (2) for processing image data from a stationary image capturing device (1) that is aimed at a predetermined viewfield, characterized in that based on a reference image of the viewfield and a current image of the viewfield, the computer (2) establishes a reference edge image and an edge image, that the computer determines the correlation of at least one region of the edge image with the corresponding partial image of the reference edge image, and that when the correlation falls below a threshold, the computer registers the region as changed.

9. The monitoring system according to claim 8, characterized in that the computer determines the correlation of the edge image with the reference edge image, that the computer is connected to a signal indicator (5) so that an alarm is output via the signal indicator (5) when the at least one region is detected as changed for a predetermined time (T1) longer than the edge image is detected as changed.

10. The monitoring system according to claim 9, characterized in that an alarm is output via the signal indicator (5) when the at least one region of the edge image is detected as changed for longer than an additional predetermined time (T2), where the additional predetermined time (T2) is greater than the predetermined time (T1).

11. The monitoring system according to [one of claims 8 to 10] claim 8, characterized in that when the threshold is exceeded, the computer determines the difference of the region of the edge image from the corresponding partial image of the reference edge image, where a possible brightness difference between the reference edge image and the edge image is eliminated from the calculation so that by computing the image noise, a determination can be made as to whether there is a deviation of the region of the edge image from the partial image of the reference edge image that does not result from the image noise and the brightness difference.

12. The monitoring system according to [one of claims 8 to 11] claim 8, characterized in that the image capturing device is a video camera.

## Claims

1. A method for detecting changes in a viewfield that is observed by a stationary image capturing device (1), in which a reference image of the viewfield is compared to at least one current image of the viewfield, characterized in that based on the reference image and the current image, a reference edge image and an edge image are established (10, 11), that the correlation of at least one region of the edge image with the corresponding partial image of the reference edge image is determined (20, 21), and that when the correlation falls below a threshold, the region is identified as changed (70).

2. The method according to claim 1, characterized in that the correlation of the edge image with the reference edge image is determined (21) and that an alarm is output (110) when at least one region is detected as changed for a predetermined time (T1) longer than the edge image is detected as changed.

3. The method according to claim 2, characterized in that an alarm is output (110) when the at least one region of the edge image is detected as changed for longer than an additional predetermined time (T2), where the additional predetermined time (T2) is greater than the predetermined time (T1).

4. The method according to claim 1, characterized in that when the threshold is exceeded, the average quadratic deviation of the region of the edge image from the corresponding partial image of the reference edge image is determined (40), where a possible brightness difference between the reference edge image and the edge image is eliminated from the calculation so that by computing the image noise, a determination can be made as to whether there is a deviation of the region of the edge image from the partial image of the reference edge image that does not result from image noise and the brightness difference.



5. The method according to claim 4, characterized in that in the event that there is no deviation, the current image noise is computed and is stored for use in a subsequent image comparison.

6. The method according to claim 1, characterized in that the viewfield contains an object to be monitored.

7. The method according to claim 6, characterized in that the object is an exhibited object, in particular in a museum, or is an automated teller machine, where at least one region is constituted by the keypad field and/or the cash distribution slot and/or a card slot of the automated teller machine.

8. A monitoring system with a computer (2) for processing image data from a stationary image capturing device (1) that is aimed at a predetermined viewfield, characterized in that based on a reference image of the viewfield and a current image of the viewfield, the computer (2) establishes a reference edge image and an edge image, that the computer determines the correlation of at least one region of the edge image with the corresponding partial image of the reference edge image, and that when the correlation falls below a threshold, the computer registers the region as changed.

9. The monitoring system according to claim 8, characterized in that the computer determines the correlation of the edge image with the reference edge image, that the computer is connected to a signal indicator (5) so that an alarm is output via the signal indicator (5) when the at least one region is detected as changed for a predetermined time (T1) longer than the edge image is detected as changed.

10. The monitoring system according to claim 9, characterized in that an alarm is output via the signal indicator (5) when the at least one region of the edge image is detected as changed for longer than an additional predetermined time (T2), where the additional predetermined time (T2) is greater than the predetermined time (T1).

11. The monitoring system according to claim 8, characterized in that when the threshold is exceeded, the computer determines the difference of the region of the edge image from the corresponding partial image of the reference edge image, where a possible brightness difference between the reference edge image and the edge image is eliminated from the calculation so that by computing the image noise, a determination can be made as to whether there is a deviation of the region of the edge image from the partial image of the reference edge image that does not result from the image noise and the brightness difference.

12. The monitoring system according to claim 8, characterized in that the image capturing device is a video camera.

4/PRTS

3.100.308.32 10/030832

10/030832

531 Rec'd PCT/PTC 10 JAN 2002

# Method for Detecting Changes of Scene, and Monitoring System Therefor

## Prior Art

5           The invention is based on a method and a monitoring system as generically defined by the preamble to the independent claims. The publication "Gefahrenmelde-  
systeme, Technik und Strukturen" [Danger Alert Systems, Technology and Structures] by  
Harald Fuhrmann, Hüttig-Verlag, Heidelberg, 1992, ISBN 3-7785-2185-3, pp. 82 – 83,  
has already disclosed comparing a reference image of a viewfield with a current image so  
10   that changes in the current image in relation to the reference image cause an alarm to be  
triggered; in order to detect differences, a gray value comparison is executed.

## Advantages of the Invention

15           The method and monitoring system according to the invention, with the characterizing features of the independent claims, have the advantage over the prior art that when people who remain in a predetermined scene for an unusual length of time are detected, when objects that are placed in a predetermined scene are detected, or when a  
20   theft of objects from a predetermined scene is detected, that is, when static changes in a predetermined viewfield are detected, then disturbance variables can be deliberately permitted. Because the image signal is not directly evaluated, i.e. the gray value or color value of the camera image, but rather the structure data contained in a camera image is evaluated; brightness changes and different illuminations of the scene are essentially not  
25   taken into account in the calculation of the detection result.

          Advantageous modifications and improvements of the method and monitoring system disclosed in the independent claims are possible by means of the steps taken in the dependent claims. It is particularly advantageous to compare the chronological course of  
30   the change in a region of interest with the chronological course of a change in the overall

image so that long-term changes of the region can be reliably detected; the required time phases of the change can be predetermined as a function of the individual intended use. Temporary changes, such as the short-term obstruction of a camera by a person, an insect sitting on the lens of the monitoring camera, or the like, are thus reliably detected as such and do not cause the alarm to be triggered.

Taking into account an additional predetermined time assures that unusual blockages of the camera, such as its being covered by a cloth, can be distinguished from other changes in the scene in order to trigger an alarm.

The use of the average, quadratic deviation of current images turns out to be an advantageously simple possibility for executing a significance test while taking into account image noise and for simultaneously producing a feature for detecting changes, which is reliable in actual practice, so that those changes are also registered, which have not yet by themselves led to classification of the region as a changed region solely based on the correlation consideration. Another improvement of the significance test is achieved in that if there is no change in the scene, the threshold for the detection is adaptively tracked on a continuing basis by means of a measurement of the current image noise. This property on the one hand permits the use of different cameras for capturing images by virtue of the fact that properties of the camera that are important for the detection are automatically and therefore independently detected and measured; on the other hand, changes in the camera during operation, e.g. when there are different lighting conditions and equipment aging conditions, these changes are taken into consideration and correspondingly compensated for.

## Drawings

Exemplary embodiments of the invention are shown in the drawings and will be explained in detail in the description that follows.



T2 is used for the detection of unusually long changes, for example when the camera is covered or during long-duration manipulations of persons committing illegal acts in the viewfield. On the other hand, the time T1 is used to distinguish short-term changes in a large part of the viewfield from a change in a region of interest. The times T1 and T2 and  
 5 the selection of the regions are also stored in the memory 4 in the same way as the reference image.

Fig. 2 shows a flowchart for the method sequence of the image processing. A stationary camera captures continuous images of a predetermined viewfield in which  
 10 possible changes are to be detected. Before the system is placed into operation, a reference image of the scene is captured and stored in a memory. With continuous monitoring, the current images of the viewfield are compared to the reference image. To this end, in process step 11, the structure data are calculated for both the reference image and the current image by virtue of the fact that the gradient of the brightness value and/or  
 15 the color value in the horizontal direction and vertical direction of the two-dimensional pictures are detected and along with them, the edge data or the data relating to jumps in the gray value or color value in the viewfield. Then in process step 21, the correlation of the gradients, which are referred to below as edge images, is calculated from the current image and the reference image. In this connection, a correlation coefficient  $r$  is calculated  
 20 according to the Bronstein-Semendjajew "Taschenbuch der Mathematik" [Pocket Edition of Mathematics], Verlag Harri Deutsch, Thun, 24<sup>th</sup> edition, 1989, formula (5.92), p. 692:

$$r = (\Sigma (x_n - \bar{x}) (y_n - \bar{y})) / \sqrt{(\Sigma (x_n - \bar{x})^2 \Sigma (y_n - \bar{y})^2)}.$$

25 In this equation,  $x_n$  is the gradient at the position  $n$  in the reference image,  $y_n$  is the gradient at the position  $n$  in the current image,  $\bar{x}$  is the average of the gradients in the reference image,  $\bar{y}$  is the average of the gradients in the current image, and  $n$  is the numbering index of the image positions which is expressed in natural numbers, for example. The summations are executed via the gradients  $x_n$  and  $y_n$  in both spatial  
 30 dimensions of the regions to be evaluated. The correlation coefficient has a value range

from  $-1$  to  $1$ . The value  $1$  here indicates the existence of an identical structure, the value  $0$  indicates that no correlation exists, i.e. a total change of the current image in comparison to the reference image. A value  $< 0$  indicates an inverse proportion and is likewise to be taken as a total change. In step 26, the correlation value thus determined is compared to a threshold  $S3$  (e.g.  $S3 = 0.3$ ). If the correlation value is greater than the threshold, then in step 81, the image is judged to be unchanged ( $B = 0$ ). Otherwise, the image is identified as changed in relation to the reference image (step 71,  $B = 1$ ).

In this evaluation, the image signal is not tested directly, but the structure data calculated from the image is tested for similarity. By using correlation of the structural features, changes between the reference image and the current image which are caused by image brightness and contrast can be taken into account, i.e. even when the two images differ in these parameters, but have similar structures at identical image positions, the evaluation of the correlation results in a large similarity measurement.

Before the monitoring is started, regions of interest are established in the viewfield to be monitored. These parts of the image, which are referred to below as regions, as well as the overall image, are subjected to a correlation consideration each time the new image is processed. To this end, in process step 10, the edge image belonging to the region is separated from the edge image obtained to in the process step 11 of Fig. 2 and in process step 20, the correlation value of the regional edge image with the corresponding partial image of the edge image of the reference image is calculated. In step 25, the correlation value of the region under consideration is compared to a threshold  $S1$  (e.g.  $S = 0.5$ ). If the correlation value lies below this threshold, then in step 70, the relevant region  $i$  is detected as changed ( $R(i) = 1$ ). By contrast, if the correlation value exceeds the threshold  $S1$ , then the similarity of the region to the corresponding partial region of the reference image is tested further. To this end, in process step 30, the change in image brightness and image contrast of the region in the current image in comparison to the reference image is calculated. Then in process step 40, the structural deviation is calculated. The average quadratic deviation of the edge image of the current image from

6



Fig. 4 shows a method sequence for evaluating the data obtained in the sequences according to Figs. 2 and 3. To this end, for each region  $R(i)$ , a test is made as to whether the value = 1 (step 91); if the answer is no, then a counter  $N(i)$  is set to zero (process step 93). A counter  $T(i)$  is also set to zero. If the answer is yes, then the counter  $N(i)$ , which  
 5 has the value 0 at the start of the process, is increased by 1 (process step 92). After process step 92, a test is made as to whether  $B = 1$  (process step 94). If  $B = 1$ , then the counter  $T(i)$  is increased by 1 (process step 95). The counter  $T(i)$  in this instance is at 0 at the beginning of the process. In the negative case, after process step 94, after process step 95, and after process step 93, a query is made (query 96) as to whether  $N(i)$  is  
 10 greater than  $T(i) + T1$  or whether  $N(i)$  is greater than  $T2$ . If not, then no alarm is triggered. If yes,  $N(i)$  and  $T(i)$  are set to zero and an alarm 110 is triggered.

The aim of the above-described evaluation process is on the one hand, to detect changes in regions as early as possible but on the other hand, to permit global changes in  
 15 the viewfield for greater time intervals. To that end, two time thresholds  $T1$  and  $T2$  are used.  $T2$  here stands for the maximal time interval for which it is permissible for a region to be changed without an alarm being triggered. For example,  $T2$  equals 15 minutes.  $T1$  stands for the earliest time after which an alarm can be triggered with regard to a region, namely precisely when the overall image has been continuously identified as unchanged  
 20 during this time. To this end, two counters per region are used:  $N(i)$  for indicating how often in direct chronological sequence a region has been identified as changed and  $T(i)$  for indicating the time at which a region was identified as "region changed" for the case in which the identification "overall image changed" has been made. By taking into account times in which the overall image has changed, changes which relate not only to  
 25 the region, but also to the overall image do not result in the triggering of an alarm, unless the overall image has changed over a related time interval with the length  $T2$  (in this regard, compare  $T2 = 15$  min, which is selected to be greater than  $T1$  at 20 sec., for example).

## Claims

1. A method for detecting changes in a viewfield that is observed by a stationary image capturing device (1), in which a reference image of the viewfield is compared to at least one current image of the viewfield, characterized in that based on the reference image and the current image, a reference edge image and an edge image are established (10, 11), that the correlation of at least one region of the edge image with the corresponding partial image of the reference edge image is determined (20, 21), and that when the correlation falls below a threshold, the region is identified as changed (70).

2. The method according to claim 1, characterized in that the correlation of the edge image with the reference edge image is determined (21) and that an alarm is output (110) when at least one region is detected as changed for a predetermined time (T1) longer than the edge image is detected as changed.

3. The method according to claim 2, characterized in that an alarm is output (110) when the at least one region of the edge image is detected as changed for longer than an additional predetermined time (T2), where the additional predetermined time (T2) is greater than the predetermined time (T1).

4. The method according to one of the preceding claims, characterized in that when the threshold is exceeded, the average quadratic deviation of the region of the edge image from the corresponding partial image of the reference edge image is determined (40), where a possible brightness difference between the reference edge image and the edge image is eliminated from the calculation so that by computing the image noise, a determination can be made as to whether there is a deviation of the region of the edge image from the partial image of the reference edge image that does not result from image noise and the brightness difference.



11. The monitoring system according to one of claims 8 to 10, characterized in that when the threshold is exceeded, the computer determines the difference of the region of the edge image from the corresponding partial image of the reference edge image, where a possible brightness difference between the reference edge image and the edge image is eliminated from the calculation so that by computing the image noise, a determination can be made as to whether there is a deviation of the region of the edge image from the partial image of the reference edge image that does not result from the image noise and the brightness difference.

10

12. The monitoring system according to one of claims 8 to 11, characterized in that the image capturing device is a video camera.

## Abstract

A method for detecting changes in a viewfield observed by a stationary image capturing device is proposed, in which edge images are calculated and are compared to  
 5 edge images of reference recordings in order to detect static changes within the observed image range that are independent of image brightness.

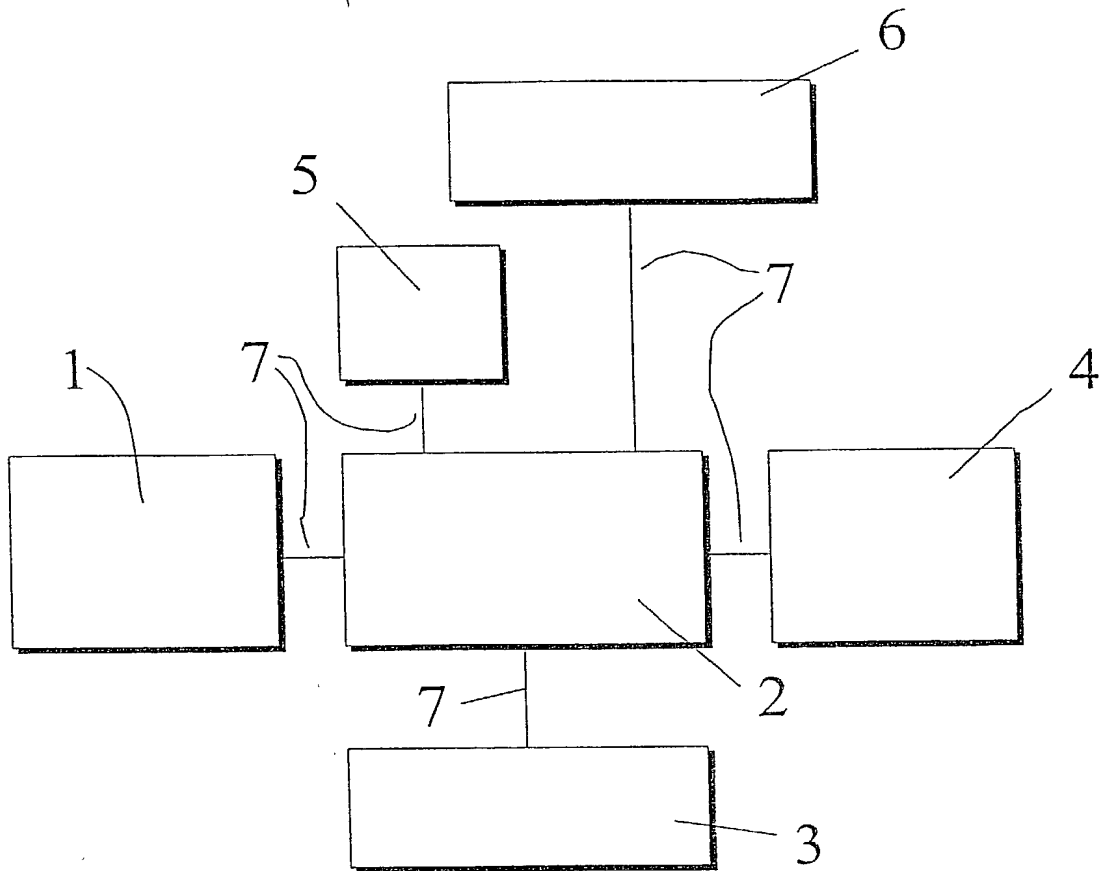


Fig.1

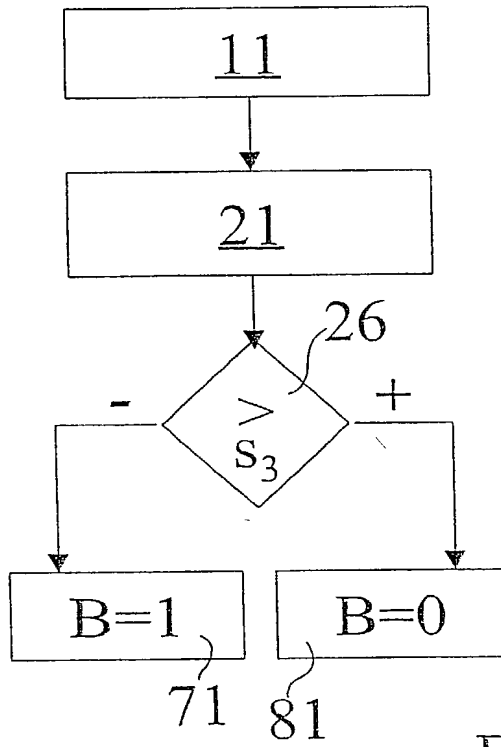


Fig.2

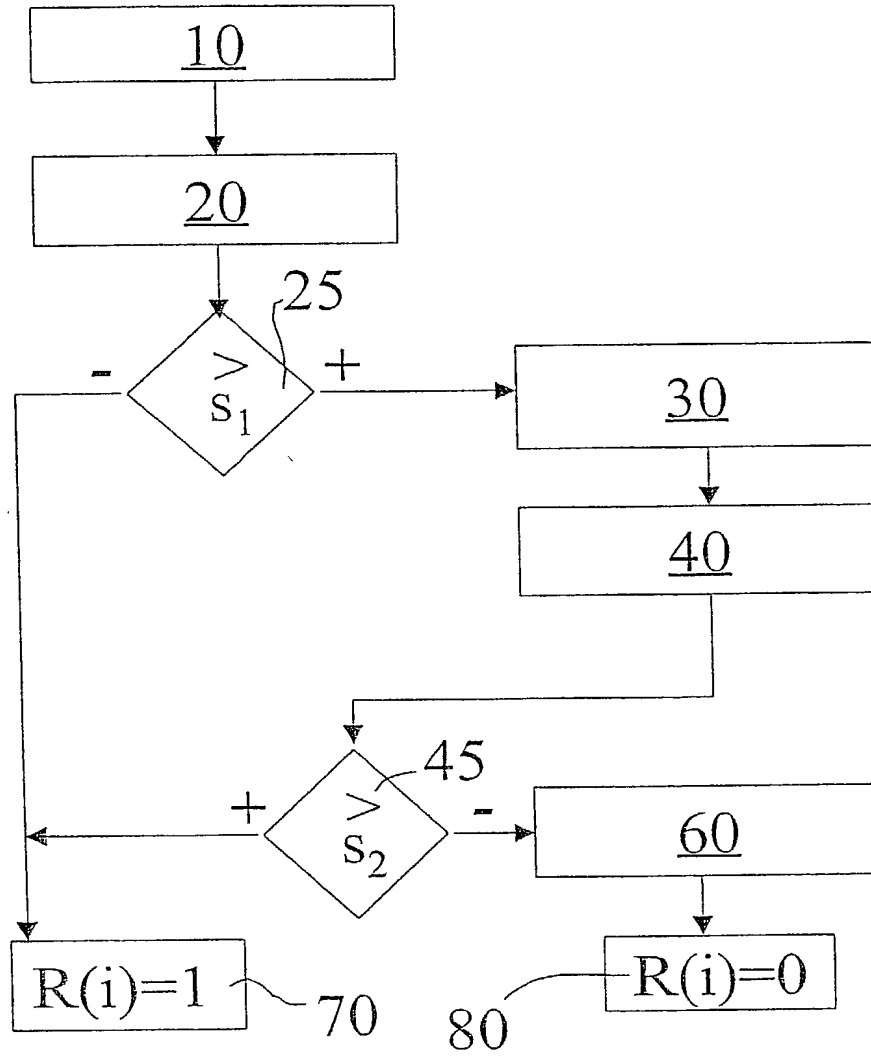


Fig. 3



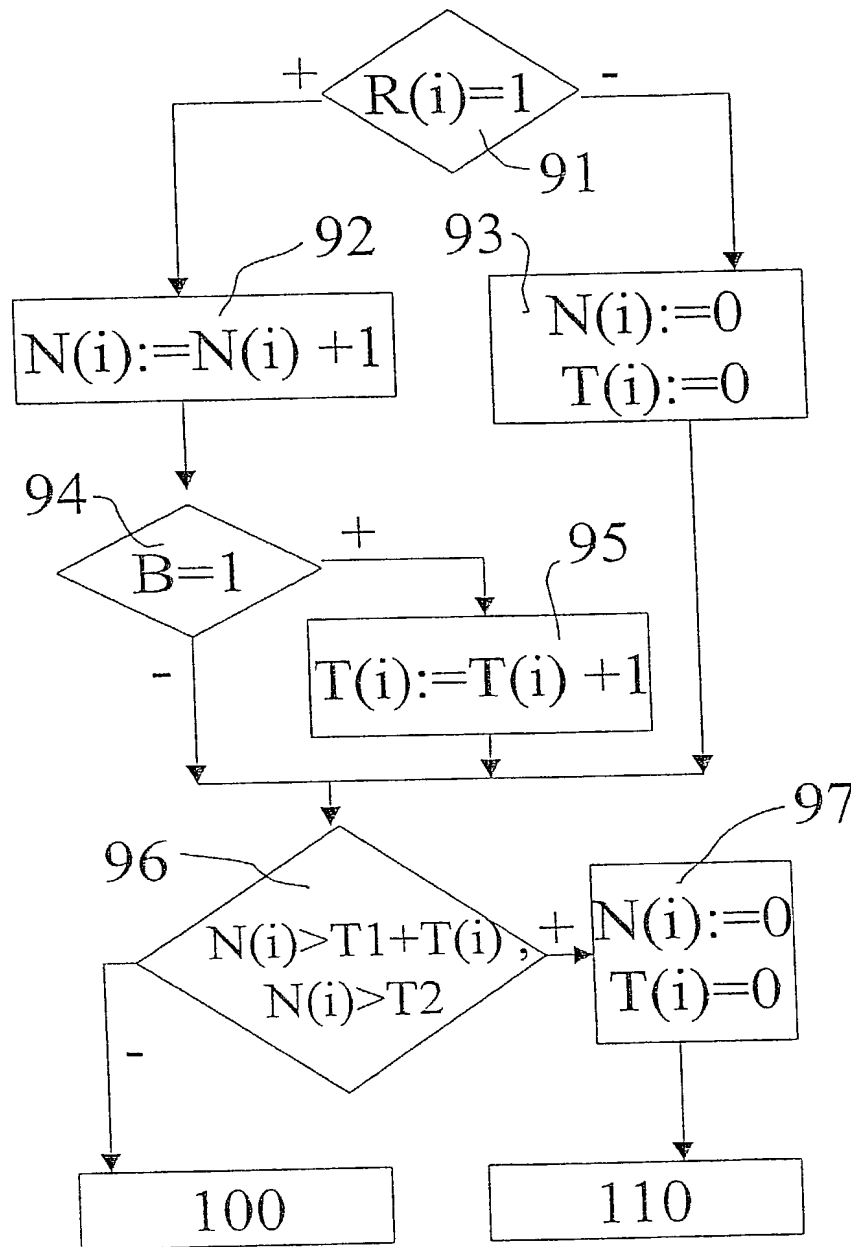


Fig.4

**DECLARATION AND POWER OF ATTORNEY FOR NATIONAL STAGE OF PCT PATENT APPLICATION**

As a below-named inventor, I hereby declare that:

Michael MEYER  
Michael HOETTER  
Jens DREVES

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD FOR DETECTING CHANGES OF SCENE, AND MONITORING SYSTEM THEREFOR** the specification of which was filed as PCT International Application number PCT/DE 00/02250 on July 11, 2000.

I hereby state that I believe the named inventor or inventors in this Declaration to be the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365 (b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior foreign application(s):

Priority claimed:

<u>199 32 662.2</u>	<u>GERMANY</u>	<u>JULY 15, 1999</u>	<u>X</u>	
(Number)	(Country)	(Date filed)	Yes	No
<u>                    </u>	<u>                    </u>	<u>                    </u>	Yes	No
(Number)	(Country)	(Date filed)	Yes	No

As a named inventor, I hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Michael J. Striker, Reg. No. 27233 (1)

Direct all telephone calls to Striker, Striker & Stenby at telephone no.: (631) 549 4700 and address and all correspondence to:

STRIKER, STRIKER & STENBY  
103 East Neck Road  
Huntington, New York 11743  
U.S.A.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment,

